MÜPRO

Single bossed clamps

with DÄMMGULAST® black, stainless steel

Application

- Suitable for attachments in industrial areas as well as in air-conditioning, ventilation and sanitary areas
- For indoor and outdoor use

Your advantages

- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- Tightening bolts with combination cross-head convenient for power driver
- Tightening bolts secured with captive washers
- Vibration control lining DÄMMGULAST® black: average vibration improvement of up to 18 dB(A)

Features

Vibration control

Rost frei EDELSTAHL STAINLESS STEEL

Size	Max. recommended load [N]
¼" - 1½"	1,300
54 mm - 3"	1,500
102 mm - 6"	2,000

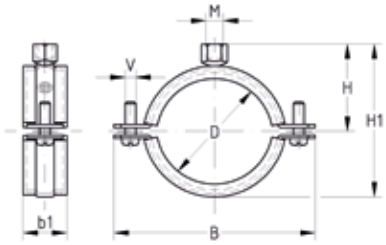

Connecting thread M	Size [inch]	Size [mm]	Clamping range [mm]	Material	Dimensions [mm] b1	B	H	H1	V	Part no.	Sales unit	Pack unit
M8/M10	¼"		12 - 14	V2A	23	54	20	33	M6 x 16	**175981**	150	Pieces
	⅜"		15 - 19			59	22	37		**175982**		
	½"		20 - 23			63	24	41		**175983**	100	
	¾"		25 - 28			69	27	46		**175984**		
	1"		32 - 35			76	30	53		**175985**		
	1¼"		40 - 43			84	35	62	M6 x 20	**175986**	50	
	1½"		44 - 49			90	38	68		**175987**		
		54	50 - 56			103	52	87		**175988**		
	2"		57 - 61			108	54	92		**175989**		
		63	63 - 67			114	57	98		**175990**		
		70	70 - 73			121	60	104		**175991**		
	2½"		74 - 80			127	64	111		**175992**		
	3"		83 - 91			138	69	122		**175993**		
		102	101 - 106			160	78	140	M6 x 25	**175994**	25	
	4"		108 - 114			168	82	148		**175995**		
		125	123 - 127			180	88	159		**175996**		
		133	131 - 135			190	93	169		**175997**		
		136	136 - 139			194	95	173		**175998**		
	5"		140 - 144			199	97	178		**175999**		
		160	159 - 163			218	107	197		**176000**		
	6"		165 - 169			224	110	203		**176001**		

© MÜPRO