MÜPRO

Single bossed clamps

without lining, stainless steel

Application

- Suitable for installations without vibration control requirements
- Suitable for attachments in industrial areas as well as in air-conditioning, ventilation and sanitary areas
- For indoor and outdoor use

Your advantages

- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- Tightening bolts with combination cross-head convenient for power driver
- Tightening bolts secured with captive washers

Features

Size	Max. recommended load [N]
¼" - 1½"	1,300
54 mm - 3"	1,500
102 mm - 6"	2,000

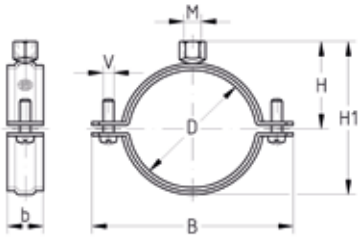

Connecting thread M	Size [inch]	Size [mm]	Clamping range [mm]	Material	Dimensions [mm] b	B	H	H1	V	Part no.	Sales unit	Pack unit
M8/M10	¼"		12 - 14	V4A	20	47	16	26	M6 x 16	**176023**	150	Pieces
	⅜"		14 - 18			50	18	30		**176024**		
	½"		20 - 25			57	22	37		**176025**	100	
	¾"		26 - 31			64	25	43		**176026**		
	1"		32 - 36			69	27	48		**176027**		
		40	38 - 43			76	31	55		**176028**	50	
	1¼"		40 - 46			79	32	58	M6 x 20	**176029**		
	1½"		47 - 51			85	35	63		**176030**		
		54	52 - 56			94	47	77		**176031**		
	2"		57 - 61			100	50	84		**176032**		
		63	63 - 67			105	52	89		**176033**		
		70	70 - 73			111	55	95		**176034**		
	2½"		74 - 80			118	59	102		**176035**		
	3"		83 - 91			129	64	113		**176036**		
		102	101 - 106			149	72	129	M6 x 25	**176037**	25	
	4"		108 - 114			157	76	137		**176038**		
		125	118 - 125			168	82	148		**176039**		
		133	131 - 135			179	87	158		**176040**		
	5"		136 - 142			185	90	165		**176041**		
		160	159 - 163			207	101	186		**176042**		
	6"		165 - 169			213	104	192		**176043**		

© MÜPRO