MÜPRO

Single bossed clamps

with DÄMMGULAST® black, hot-dip galvanised

Application

- Suitable for fixings in industrial areas
- Suitable for fastening of drinking water and heating pipes
- Suitable for outdoor use

Your advantages

- Positive-fit vibration control lining DÄMMGULAST® with clip-over edges that prevent the lining from slipping out of the clamp
- Average vibration reduction up to 21 dB(A)
- Excellent corrosion resistance
- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- Connecting thread with combithread M8/M10

Features

Vibration control

Size	Max. recommended load [N]
⅜" - 2"	1,200
70 - 102 mm	1,900
4" - 133 mm	2,300
5" - 6"	2,700

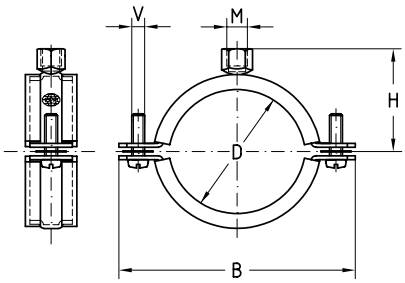

Connecting thread M	Size [inch]	Size [mm]	Clamping range [mm]	Dimensions [mm] b1	B	H	H1	V	Part no.	Sales unit	Pack unit
M8/M10	⅜"		15 - 20	21	52.5	35.5	50	M6	**177547**	200	Pieces
	½"		21 - 25		58.5	37.5	54		**177548**		
	¾"		25 - 30		62.5	39.5	59		**177549**		
	1"		32 - 37		70.5	42.5	65		**177550**		
	1¼"		40 - 45		78.5	45.5	73		**177551**	100	
	1½"		46 - 53		86.5	49	80		**177552**		
		57	54 - 58		92.5	51	84		**177553**		
	2"		59 - 63		96.5	53	89		**177554**		
		70	63 - 70	23	103	56	95		**177555**		
	2½"		72 - 78		111	60	103		**177556**		
		83	78 - 86		119	64	111		**177557**		
	3"		87 - 93		126	67.5	118		**177558**		
		102	98 - 104		137	73	129		**177559**	50	
	4"		108 - 115		152	79	141		**177560**		
		116	114 - 118		156	81	145		**177561**		
		120	119 - 123		162	84	151		**177562**		
		125	124 - 130		176	87	157	M8	**177563**		
		133	132 - 137		184	91	165		**177564**		
	5"		137 - 142	28	195	96	175		**177565**		
		145	143 - 150		202	99	181		**177566**		
		155	151 - 158		210	103	189		**177567**		
		160	159 - 163		217	107	197		**177568**		
	6"		164 - 168		224	109.5	202		**177569**		

09/2026