

Single bossed clamps

without lining, VdS approval, powder-coated

Application

- Suitable for direct pipe fixation due to powder-coating
- Attachment of sprinkler and Marioff HI-FOG® pipes
- Suitable for installations without vibration control requirements
- For fastening sprinkler pipes as per VdS Guidelines

Your advantages

- Approved by VdS
- Quick and easy to install
- Galvanised tightening bolts with combination cross-head convenient for power driver
- Tightening bolts secured with captive washers
- Flexible connection thread depending on the application




Features

VdS

G 418067

Size	Max. recommended load [N]
3/8" - 70 mm	1,900
2 1/2" - 6"	4,400

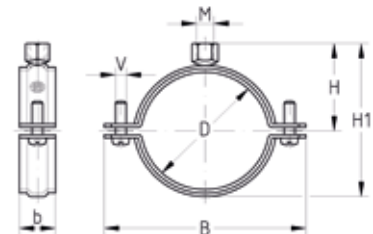

Connecting thread M	Size		Clamping range [mm]	VdS	Connecting thread VdS	Dimensions [mm]					Part no.	Sales unit	Pack unit
	[inch]	[mm]				b	B	H	H1	V			
M8/M10	⅜"		11 - 18	x	M8/M10	20	50	27.5	39	M6 x 25	176530	50	Pieces
	½"		19 - 25	x			57	30.5	45		176531		
	¾"		26 - 30	x			64	40.5	60		176532		
	1"		31 - 37	x			71	43.5	66		176533		
		40	38 - 42	x			75	45.5	70		176534		
	1¼"		43 - 47	x			81	48.5	76		176535	25	
	1½"		47 - 52	x			87	51	78		176536		
		57	53 - 57	x			91	53.5	86		176537		
	2"		58 - 63	x			100	57.5	94		176538		
							105	60	99		176539		
M10/M12		70	64 - 71	x	M10/M12	25	120	64.5	108	M8 x 40	176541		
	2½"		72 - 78	x			126	67.5	114		176542		
		83	79 - 85	x			131	70	119		176543		
	3"		85 - 90	x			142	75	129		176544		
		98	94 - 99	x			146	77	133		176545		
		102	99 - 104	x			157	82.5	144		176546		
	4"		108 - 115	x	M12	166	87	153	176547				
		122	118 - 123	x		172	90	159	176548				
		125	125 - 130	x		182	95	169	176549				
	5"		133 - 140	x		191	99.5	178	176550				
		147	142 - 148	x		196	102	183	176551				
		152	148 - 153	x		202	105	189	176552				
		160	154 - 160	x		210	109	197	176553				
	6"		160 - 169	x									



Single bossed clamps with VdS approval 3/8" - 2" are to be used only with connecting thread ≥ M8.

Single bossed clamps with VdS approval 70 mm - 4" are to be used only with connecting thread ≥ M10.

Single bossed clamps with VdS approval 122 mm - 6" are to be used only with connecting thread M12.

From a pipe clamp size of more than 3", our purchasing conditions apply on request. Please contact us for further information.