MÜPRO

Single bossed clamps

with DÄMMGULAST® yellow, galvanised

Application

- Suitable combination for pipelines with dynamic loads with expansion points
- Suitable for fixings in shipbuilding and industrial areas
- Suitable for fixings in air-conditioning, ventilation and sanitary areas
- For indoor use

Your advantages

- Proven two-piece single bossed clamp
- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- Tightening bolts with combination cross-head convenient for power driver
- Tightening bolts secured with captive washers
- Heavy-duty type with high load capacity due to creased shape
- Acoustic insulation, positive-fit liner with wide clip-over edges prevent the lining from slipping out of the pipe clamp
- DÄMMGULAST® vibration control lining with yellow identification stripe: average sound level improvement up to 22 dB(A)
- This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) up to size ≤ 200 mm and is submitted to controls according to RAL-GZ 655-B

Features

Size	Max. recommended load [N]
⅜" - 2"	1,700
70 - 83 mm	2,200
3" - 6"	2,900
170 - 200 mm	3,500
212 - 225 mm	5,800

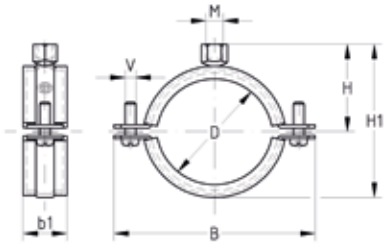

Connecting thread M	Size [inch]	Size [mm]	Clamping range [mm]	Dimensions [mm] b1	B	H	H1	V	Part no.	Sales unit	Pack unit
M8/M10		6	6 - 9	23	50	27.5	39	M6 x 20	**161639**	100	Pieces
		10	10 - 13		57	30.5	45		**161640**		
	⅜"		14 - 20		64	35.5	55		**151359**		
	½"		21 - 26		71	38.5	61		**151360**		
	¾"		26 - 30		75	40.5	65		**151361**		
	1"		31 - 38		81	43.5	71	M6 x 25	**151362**		
	1¼"		40 - 47		91	48.5	81		**151364**	50	
	1½"		48 - 54		100	52.5	89		**151365**		
		57	54 - 60		105	55	94		**151366**		
	2"		60 - 66		111	58	100		**151367**		
		70	68 - 73	28	126	62.5	109	M8 x 35	**151369**		
	2½"		73 - 80		131	65	114		**151370**		
		83	82 - 87		142	70	124		**151371**		
	3"		87 - 94		146	72	128	M8 x 40	**151372**		
		102	99 - 104		157	77.5	139		**151373**		
		110	105 - 112		166	82	148		**151374**		
	4"		112 - 118		172	85	154		**151375**		
		125	122 - 128		182	90	164		**151376**		
		133	132 - 137		191	94.5	173		**151377**		
	5"		137 - 142		196	97	178		**151378**		
		144	142 - 148		202	100	184		**151379**		
		150	149 - 156		210	104	192		**151380**		
		160	159 - 164		218	108	200		**151422**		
	6"		164 - 169		223	110.5	205		**151423**		
		170	169 - 172		225	111.5	207		**151424**		

Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.

For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.

© MÜPRO

Single bossed clamps

with DÄMMGULAST® yellow, galvanised

Connecting thread M	Size [inch]	Size [mm]	Clamping range [mm]	Dimensions [mm] b1	B	H	H1	V	Part no.	Sales unit	Pack unit
M10/M12	⅜"		14 - 20	23	64	40.5	60	M6 x 20	**151425**	100	Pieces
	½"		21 - 26		71	43.5	66		**151426**		
	¾"		26 - 30		75	45.5	70		**151427**		
	1"		31 - 38		81	48.5	76	M6 x 25	**151428**		
	1¼"		40 - 47		91	53.5	86		**151430**	50	
	1½"		48 - 54		100	57.5	94		**151431**		
		57	54 - 60		105	60	99		**151432**		
	2"		60 - 66		111	63	105		**151433**		
		70	68 - 73	28	126	67.5	114	M8 x 35	**151435**		
	2½"		73 - 80		131	70	119		**151436**		
		83	82 - 87		142	75	129		**151437**		
	3"		87 - 94		146	77	133	M8 x 40	**151438**		
		102	99 - 104		157	82.5	144		**151439**		
		110	105 - 112		166	87	153		**151440**		
	4"		112 - 118		172	90	159		**151441**		
		125	122 - 128		182	95	169		**151442**		
		133	132 - 137		191	99.5	178		**151443**		
	5"		137 - 142		196	102	183		**151444**		
		150	149 - 156		210	109	197		**151446**		
		160	159 - 164		218	113	205		**151447**		
	6"		164 - 169		223	115.5	210		**151448**		
		170	169 - 172		225	116.5	212		**151449**		
		180	177 - 183		235	122	223		**151450**	25	
		200	197 - 203		256	132	243		**151451**		
		212	208 - 214	46	284	138.5	256	M10 x 40	**151452**		
	8"		217 - 225		295	144	267		**151453**		
		225	225 - 232		304	147.5	274		**151454**		
M12/M16/½" ET		160	159 - 164	28	218	117	209	M8 x 40	**151458**	50	
	6"		164 - 169		223	119,5	214		**151459**		
		170	169 - 172		225	120,5	216		**151460**		
		180	177 - 183		235	126	227		**151461**	25	
		200	197 - 203		256	136	247		**151462**		
		212	208 - 214	46	284	142,5	260	M10 x 40	**151463**		
	8"		217 - 225		295	148	271		**151464**		

Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.
For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.

09/2026

© MÜPRO