Single bossed clamps

with DÄMMGULAST® red, galvanised

Application

- Suitable combination for pipelines with dynamic loads with expansion points
- Suitable for fixings in shipbuilding and industrial areas
- Suitable for fastening of drinking water and heating pipes as well as for thermical oil pipes
- Attachment of pipelines in increased temperature ranges
- For indoor use

Your advantages

- Proven two-piece single bossed clamp
- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- With high-temperature resistant DÄMMGULAST® Vibration control lining red
- The high-quality DÄMMGULAST® section maintains its properties in the temperature range -60 °C to +200 °C
- Average sound level improvement up to 24 dB(A)
- Tightening bolts with combination cross-head convenient for power driver
- Tightening bolts secured with captive washers
- Heavy-duty type with high load capacity due to creased shape
- Acoustic insulation, positive-fit liner with wide clip-over edges prevent the lining from slipping out of the pipe clamp
- This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) up to size ≤ 200 mm and is submitted to controls according to RAL-GZ 655-B

Features

Size	Max. recommended load [N]
⅜" - 2"	1,300
70 - 83 mm	1,900
3" - 4"	2,200
125 mm - 6"	2,700
8"	5,300

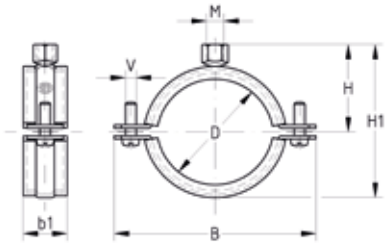

Connecting thread M	Size [inch]	Size [mm]	Clamping range [mm]	Dimensions [mm] b1	B	H	H1	V	Part no.	Sales unit	Pack unit
M8/M10	⅜"		14 - 20	23	64	35.5	55	M6 x 20	**151532**	100	Pieces
	½"		21 - 26		71	38.5	61		**151533**		
	¾"		26 - 30		75	40.5	65		**151534**		
	1"		31 - 38		81	43.5	71	M6 x 25	**151535**		
	1¼"		40 - 47		91	48.5	81		**151537**	50	
	1½"		48 - 54		100	52.5	89		**151538**		
		57	54 - 60		105	55	94		**151539**		
	2"		60 - 66		111	58	100		**151540**		
		70	68 - 73	28	126	62.5	109	M8 x 35	**151542**		
	2½"		73 - 80		131	65	114		**151543**		
		83	82 - 87		142	70	124		**151544**		
	3"		87 - 94		146	72	128	M8 x 40	**151545**		

Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.
For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.

09/2026

© MÜPRO

MÜPRO

Single bossed clamps

with DÄMMGULAST® red, galvanised

Connecting thread M	Size [inch]	Size [mm]	Clamping range [mm]	Dimensions [mm] b1	B	H	H1	V	Part no.	Sales unit	Pack unit
M8/M10		102	99 - 104	28	157	77.5	139	M8 x 40	**151546**	50	Pieces
		110	105 - 112		166	82	148		**151547**		
	4"		112 - 118		172	85	154		**151548**		
		125	122 - 128		182	90	164		**151549**		
		133	132 - 137		191	94.5	173		**151550**		
	5"		137 - 142		196	97	178		**151551**		
		144	142 - 148		202	100	184		**151552**		
		150	149 - 156		210	104	192		**151553**		
		160	159 - 164		218	108	200		**151554**		
	6"		164 - 169		223	110.5	205		**151555**		
M10/M12	1"		31 - 38	23	81	48.5	76	M6 x 25	**151560**	100	
	1¼"		40 - 47		91	53.5	86		**151562**	50	
	1½"		48 - 54		100	57.5	94		**151563**		
		57	54 - 60		105	60	99		**151564**		
	2"		60 - 66		111	63	105		**151565**		
	2½"		73 - 80	28	131	70	119	M8 x 35	**151568**		
	3"		87 - 94		146	77	133	M8 x 40	**151570**		
	4"		112 - 118		172	90	159		**151573**		
	5"		137 - 142		196	102	183		**151576**		
	6"		164 - 169		223	115.5	210		**151580**		
	8"		217 - 225	46	295	144	267	M10 x 40	**151585**	25	

Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.

For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.

© MÜPRO