

### Single bossed clamps without lining, galvanised

#### Application

- Applicable as a pipeline anchor point from 1/2" to 1 1/2"
- Suitable for installations without vibration control requirements
- Suitable for fixings in shipbuilding and industrial areas
- Suitable for fixings in shipbuilding and industrial areas as well as in air-conditioning, ventilation and sanitary areas
- For indoor use

#### Your advantages


- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- Tightening bolts secured with captive washers
- Robust design
- Tightening bolts with combination cross-head convenient for power driver
- This product is awarded with the „Gütezeichen Rohrbefestigung“ (quality mark of pipe support) up to size ≤ 210 mm and is submitted to controls according to RAL-GZ 655-B



#### Features



Size	Max. recommended load [N]
3/8" - 70 mm	1,900
2 1/2" - 174 mm	4,400
179 - 210 mm	5,000
223 - 234 mm	5,300

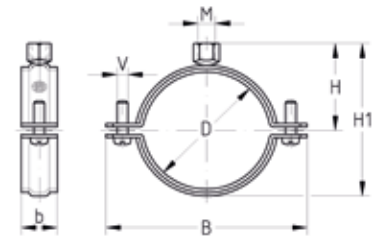

Connecting thread M	Size		Clamping range [mm]	Dimensions [mm]				Part no.	Sales unit	Pack unit
	[inch]	[mm]		b	B	H	H1			
M8/M10	3/8"		14 - 18	20	50	27.5	39	M6 x 20	100	Pieces
	1/2"		19 - 25		57	30.5	45			
	3/4"		26 - 30		64	35.5	55			
	1"		31 - 37		71	38.5	61			
		40	35 - 42		75	40.5	65			
	1 1/4"	42.4	42 - 46		81	43.5	71			
	1 1/2"		47 - 52	87	46	76	M6 x 25	50		
		57	53 - 57	91	48.5	81				
	2"		58 - 63	100	52.5	89				
		70	64 - 71	105	55	94				
	2 1/2"		72 - 78	120	59.5	103				
		83	79 - 85	126	62.5	109				
	3"		85 - 90	131	65	114	M8 x 35			
		98	94 - 99	142	70	124				
		102	99 - 104	146	72	128				
	4"		108 - 115	157	77.5	139				
		122	118 - 123	166	82	148				
		125	125 - 130	172	85	154				
5"		133 - 140	182	90	164	M8 x 40				
	147	142 - 148	191	94.5	173					
	152	148 - 153	196	97	178					
	160	154 - 160	202	100	184					
6"		160 - 169	210	104	192					
	174	170 - 175	218	108	200					

**!** Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications. For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.

## Single bossed clamps

without lining, galvanised

Connecting thread M	Size		Clamping range [mm]	Dimensions [mm]					Part no.	Sales unit	Pack unit	
	[inch]	[mm]		b	B	H	H1	V				
M10/M12	1"		31 - 37	20	71	43.5	66	M6 x 20	151625	100	Pieces	
	1¼"	42.4	42 - 46		81	48.5	76	M6 x 25	151627			50
	1½"		47 - 52		87	51	81		151628			
	2"		58 - 63		100	57.5	94		151630			
	2½"		72 - 78		25	120	64.5	108	M8 x 35			
	3"		85 - 90	131		70	119		151635			
		102	99 - 104	146		77	133	M8 x 40	151637			
	4"		108 - 115	157		82.5	144		151638			
		125	125 - 130	172		90	159		151640			
	5"		133 - 140	182		95	169		151641			
		147	142 - 148	191		99.5	178		151642			
		152	148 - 153	196		102	183		151643			
		160	154 - 160	202		105	189		151644			
	6"		160 - 169	210		109	197		151645			
		174	170 - 175	218	113	205		151646				
		179	175 - 180	223	115.5	210		151647				
	7"	190	187 - 194	235	122	223		151649	25			
			206 - 214	256	132	243		151650				
		M12/M16/½" ET	223	218 - 226	40	284	136	260		M10 x 40		159179
			234	227 - 235		295	142.5	271				159180



Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications.  
 For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.