

Pipe slides type DS-2


with two pipe clamps, DIN 3567

Application

- Attachment of pipelines preferably with insulation in heavy-duty building technology, industrial construction and plant engineering
- Preferred for insulated pipes
- For insulation thicknesses up to 140 mm

Your advantages

- Special lengths are available upon request
- Also available with polyamide sliding plate on request
- Also available in stainless steel as well as in primer coated version upon request

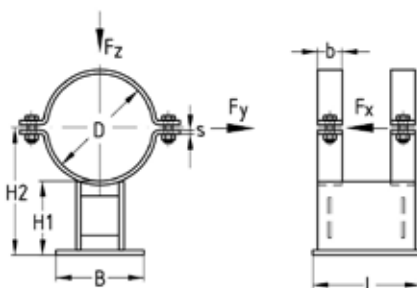

Features

Material	Code for material	Surface	Code for surface	Lock bolts and nuts	Code for bolts
S235JR (St37)	W37	untreated	OR	Strength class 8.8, galvanised	SG
		hot-dip galvanised	OF	Strength class 8.8, hot-dip galvanised	SF

Nominal size DN	Pipe outer Ø D [mm]	Dimensions [mm]						Loading			Weight [kg]	Design W37-OR-SG	Design W37-OF-SF	Sales unit	Pack unit
		b	s	B	H1	H2	L	Fx [kN]	Fy [kN]	Fz [kN]		Part no.	Part no.		
175	191	50	8	180	150	246	220	12	12	24	13.7	115980	116254	1	Pieces
	193.7					247					13.76	115982	116260		
200	216	60	220	258	260	17	17	34	14.2	115985	116266				
	219.1								260	14.3	115989	116272			
250	267	70	300	284	300	21.5	21.5	43	18.65	115992	116278				
	273								287	18.79	115995	116284			
300	315	10	353	360	23	23	46	20.37	115998	116290					
	323.9							312	20.58	116001	116296				
350	355.6	70	10	404	411	25	25	50	21.44	116004	116302				
	368								334	21.91	116007	116309			
400	406.4	70	10	455	300	21.5	21.5	43	33.53	116010	116315				
	419								360	34.03	116013	116321			
500	508	70	10	404	411	23	23	46	37.27	116016	116327				
	521								411	37.92	116019	116333			
600	610	70	10	455	300	25	25	50	41.47	116022	116339				

Ordering example: Twin-stay slide guide made from S235JR (St37) with 2 pipe clamps, pipe slide hot-dip galvanised, with hot-dip galvanised bolts and nuts, strength class 8.8, for pipe outer diameter of 406.4 mm.

Part no.: 116315, Type: DS-2-W37-OF-SF-406.4



Pipe guides with polyamide sliding surface as well as other versions available upon request.