

Pipe slides type LP-2


with two pipe clamps, DIN 3567

Application

- Attachment of pipelines in heavy-duty building technology, industrial construction and plant engineering
- For insulation thicknesses up to 80 mm

Your advantages

- Special lengths are available upon request
- Also available with polyamide sliding plate on request
- Also available in stainless steel as well as in primer coated version upon request

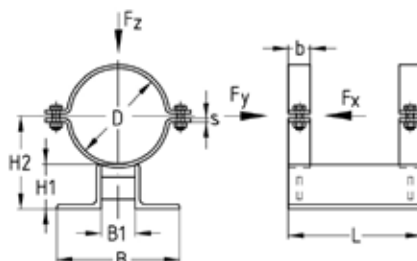

Features

Material	Code for material	Surface	Code for surface	Lock bolts and nuts	Code for bolts
S235JR (St37)	W37	untreated	OR	Strength class 8.8, galvanised	SG
		hot-dip galvanised	OF	Strength class 8.8, hot-dip galvanised	SF

Nominal size DN	Pipe outer Ø D [mm]	Dimensions [mm]							Loading			Weight [kg]	Design W37-OR-SG	Design W37-OF-SF	Sales unit	Pack unit		
		b	s	B	B1	H1	H2	L	Fx [kN]	Fy [kN]	Fz [kN]		Part no.	Part no.				
175	191	50	8	269	69	102	198	300	10	10	20	14.74	116257	116209	1	Pieces		
	193.7			270	70	199	14.8					116263	116212					
200	216			277	77	101	209					15.21	116269	116215				
	219.1			278	78	211	10.5					10.5	21	15.3			116275	116218
250	267	60	294	94	100	233	11.2	11.2	22.4	18.21	116281	116221						
	273		296	96	236	18.33				116287	116224							
300	315		310	110	99	256				19.41	116293	116227						
	323.9		313	113	98	260				19.6	116299	116230						
350	355.6	324	124	97	275	20.87	116306	116233										
	368	328	128	281	21.32	116312	116236											
400	406.4	70	10	342	142	98	301	13.1	13.1	26.2	28.58	116318	116239					
	419			346	146	97	307				29.07	116324	116242					
500	508			376	176	95	349				14.5	14.5	29	32.15			116330	116245
	521			380	180	355	32.78							116336			116248	
600	610	410	210	92	397	14.9	14.9	29.8	36.17	116342	116251							

Ordering example: L-section slide guide made from S235JR (St37) with 2 pipe clamps, pipe slide hot-dip galvanised, with hot-dip galvanised bolts and nuts, strength class 8.8, for pipe outer diameter of 267 mm.

Part no.: 116221, Type: LP-2-W37-OF-SF-267.0



Pipe guides with polyamide sliding surface as well as other versions available upon request.