

Pipe slides type TF-1



with one pipe clamp, DIN 3567

Application

- Attachment of pipelines preferably with insulation in heavy-duty building technology, industrial construction and plant engineering
- Preferred for insulated pipes
- For insulation thicknesses up to 140 mm

Your advantages

- Special lengths are available upon request
- Also available with polyamide sliding plate on request
- Also available in stainless steel as well as in primer coated version upon request

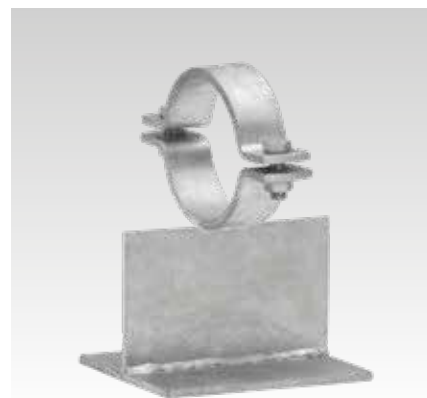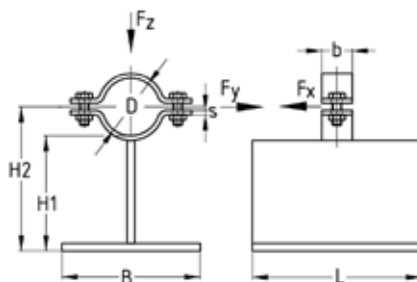

Features

Material	Code for material	Surface	Code for surface	Lock bolts and nuts	Code for bolts
S235JR (St37)	W37	untreated	OR	Strength class 8.8, galvanised	SG
		hot-dip galvanised	OF	Strength class 8.8, hot-dip galvanised	SF

Nominal size DN	Pipe outer Ø D [mm]	Dimensions [mm]						Loading			Weight [kg]	Design W37-OR-SG	Design W37-OF-SF	Sales unit	Pack unit
		b	s	B	H1	H2	L	Fx [kN]	Fy [kN]	Fz [kN]		Part no.	Part no.		
25	33.7	30	5	180	150	167	220	0.5	0.5	1	5.3	116403	116366	1	Pieces
32	42.4					171		0.7	0.7	1.4	5.4	116406	116369		
40	48.3					174		1	1	2	116410	116372			
50	60.3	40	6	180	1.6	1.6		3.2	5.7	116413	116375				
65	76.1			188	1.8	1.8		3.6	5.8	116419	116380				
80	88.9			195	2	2		4	5.9	116422	116382				
100	114.3			207	2.6	2.6		5.2	6.9	116397	116357				
125	139.7	50	8	220	3	3		6	7.1	116400	116360				
150	168.3			234	3.2	3.2		6.4	7.3	116416	116363				

Ordering example: T-section slide guide made from S235JR (St37) with 1 pipe clamp, pipe slide hot-dip galvanised, with hot-dip galvanised bolts and nuts, strength class 8.8, for pipe outer diameter of 114.3 mm.

Part no.: 116357, Type: TF-1-W37-OF-SF-114.3



Pipe guides with polyamide sliding surface as well as other versions available upon request.