MÜPRO

Duct joint clamps

Application

- Simple and quick flange connection for large cross-section ducts and high pressure conditions

Your advantages

- No pre-clamping or drilling required
- Supplied with hexagon head bolt already inserted
- High load capacity due to reinforcing rib

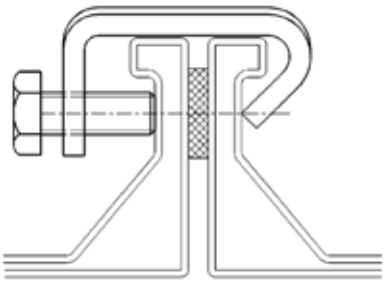

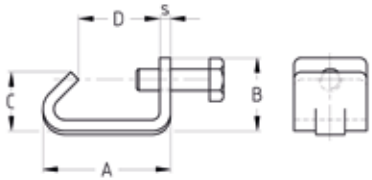

Design	Length [mm]	Hexagon head bolt	Dimensions [mm] A	B	C	D	s	Part no.	Sales unit	Pack unit
galvanised	35	M8 x 20 mm	35	20	17	23	3	**116570**	100	Pieces
	31		31	23		18	4	**116576**		
	35	M8 x 25 mm	35	20		23	3	**116573**	1	
V2A	30	M8 x 20 mm	30	18	11	20	2.5	**116567**	100	

Normally recommended spacing 300-400 mm. For ducts with a side length of less than 800 mm, one clamp needs to be mounted in center of each side.

Self-drilling screws

DIN 7504, with hexagonal head, for the attachment of air pipes, ducts, spiral-seam pipes, without pre-drilling, galvanised

Sheet metal thread G [mm]	Length L [mm]	Screw head diameter [mm]	Spanner width [mm]	Part no.	Sales unit	Pack unit
4.2	13	8.5	7	**106661**	500	Pieces
	16			**106663**		
	19			**106665**		
	22			**106666**		
4.8	13	10	8	**106668**		
	16			**106670**		
	19			**106671**		
	38			**106672**		
5.5	32	10.5		**106673**		
6.3	16	12.7	10	**106674**		
	25			**106675**		
	32			**106676**		
	45			**106677**		



© MÜPRO