

Single bossed clamps

without lining

Field of application

- Suitable for installations without vibration control requirements
- Suitable for attachments in industrial areas as well as in air-conditioning, ventilation and sanitary areas
- For indoor and outdoor use

Advantages


- 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter
- Tightening bolts with combination cross-head convenient for power driver
- Tightening bolts secured with captive washers



Features



Size	Max. recommended load [N]
¼"–1½"	1,300
54 mm–3"	1,500
102 mm–6"	2,000

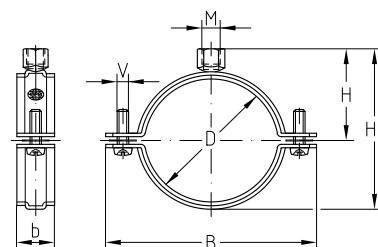

Connecting thread	Size		Clamping range [mm]	Part no. V4A	Sales unit	Pack unit	Dimensions [mm]				
	[inch]	[mm]					B	b	H1	H	V
M8/M10	¼		12–14	176023	150	pieces	47	20	26	16	M6 x 16
	⅜		14–18	176024	50		30		18		
	½		20–25	176025	100		57		37	22	
	¾		26–31	176026			64		43	25	
	1		32–36	176027			69		48	27	
		40	38–43	176028		50	76	55	31	M6 x 20	
	1¼		40–46	176029	79		58	32			
	1½		47–51	176030	85		63	35			
		54	52–56	176031	94		77	47			
	2		57–61	176032	100		84	50			
		63	63–67	176033	105		89	52	M6 x 25		
		70	70–73	176034	111		95	55			
	2½		74–80	176035	118		102	59			
	3		83–91	176036	129		113	64			
		102	101–106	176037	149		129	72			
	4		108–114	176038	157		137	76			
		125	118–125	176039	168		148	82			
		133	131–135	176040	179		158	87			
	5		136–142	176041	185		165	90			
		160	159–163	176042	207		186	101			
	6		165–169	176043	213		192	104			