

MPC-Quick fasteners+



with external thread, galvanised

Field of application


- Secure and easy installation in slot of MPC-Support channel in order to connect pipe clamps
- For use in dry interiors

Advantages

- Time-saving attachment in the channel slot, even if subsequently fitted between existing pipe sections
- Simple and secure handling: insert in the MPC-Support channels - turn - and the MPC-Quick fastener is fixed. No slipping, no falling out
- Adjustment marks on the side facilitate its positioning in the support channel
- High quality and load capacity
- Suitable for all MPC-Support channels 38/24 to 40/120
- Threaded pins secured against unscrewing

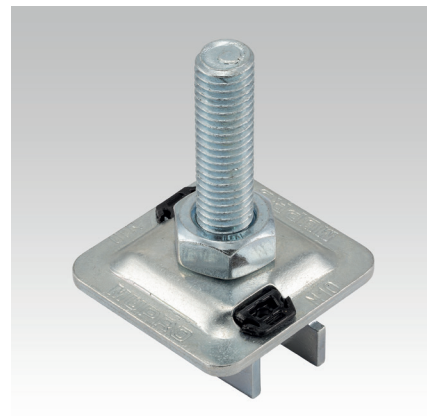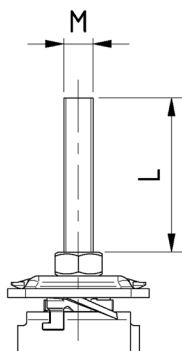

For support channels	Connecting thread	Usable thread length L [mm]	Total length [mm]	Part no.	Sales unit	Pack unit
38/24-40/120	M8	7	37	175773	50	pieces
		30	60	175774		
		40	70	175775		
	M10	7	37	175776		
		25	55	175777		
		50	80	175778		



Features



For support channels	Connecting thread	Max. recommended tensile load Fz [N]	For a tightening torque of [Nm]
38/24	M8	2,000	9
	M10		17
38/40, 38/80	M8	2,800	9
	M10		17
39/52	M8	3,300	9
	M10		17
40/60, 40/80, 40/120	M8	4,000	9
	M10		17