

Duct clamps

without lining, galvanised

Field of application

- For attachment of spiral-seam pipes

Advantages

- For attachment of spiral-seam pipes
- The 2 locking screws allow adjustment to accommodate a greater variation in pipe diameter

- Locking screws with combi-cross slit head and captive washer convenient for screwdrivers and nominal pipe size of up to 400 mm, M10 Hexagon screws for pipe sizes from 450 mm and upwards
- Manufactured to suite connecting thread M8/M10



Pipe nominal size [mm]	Connecting thread	Part no.	Sales unit	Pack unit
80	M8/M10	175917	50	pieces
90		175918		
100		175919		
112		175920		
125		175921		
140		175922		
150		175923		
160		175924		
180		175925		
200		175926		
224		115657		
250		115663		
280		115669		
300		115672		
315		115678		
355		115681		
400		115687		
450		115690	1	
500		115693		
560		115696		
600		115699		
630		115704		
710		115710		
800		115716		

 Duct clamps can be produced in all other pipe sizes and types according to customer specifications.


 For stainless steel version (without lining or with DÄMMGULAST® Junior lining) please refer to chapter „Stainless steel“.

Duct clamps

without lining, galvanised

Features

Max. recommended load [N]	500
---------------------------	-----

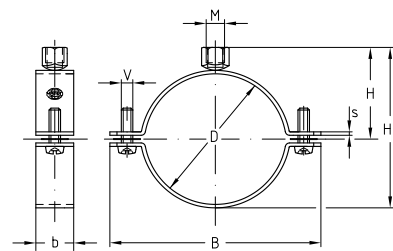

Pipe nominal size [mm]	Dimensions[mm]				
	V	b x s	B	H	H1
80	M6	20 x 1.2	119	50	91
90			129	55	101
100			139	60	111
112			151	66	123
125			164	72	136
140			179	80	151
150			189	85	161
160			199	90	171
180			219	100	191
200			239	110	211
224		25 x 2.5	272	131	247
250			298	144	273
280			328	159	303
300			349	170	324
315			364	177	339
355			404	197	379
400			449	220	424
450	M10		515	245	474
500			565	270	524
560			625	300	584
600		665	320	624	
630		25 x 3.0	696	335	655
710			776	375	735
800			866	420	825

