


MPR-Hammer head fasteners

Field of application

- For time-saving, efficient attachment of pipe clamps to MPR-Support channels
- For indoor and outdoor use

Advantages



- Easy and fast assembly in the rail slot
- Lateral adjustment at any time, allows perfect alignment of the pipeline after installation
- Various lengths and thread diameters can be combined within the same channel
- Interlocking threaded plate for secure positive connection in the rail slot of the MPR-Support channels



Features



For support channels	Connecting thread	Length [mm]	Usable thread length L [mm]	Material	Part no.	Sales unit	Pack unit
41/21/2.0, 41/41/2.0, 41/62/2.5, 41/82/2.0, 41/124/2.5	M8	35	10	V4A	154413	25	pieces
		50	25		154415		
	M10	35	8		154418		
	M12	40	9		154424		

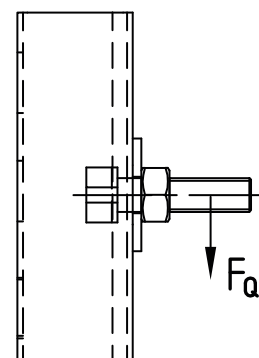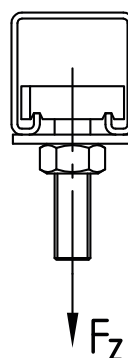

For support channels Material thickness [mm]	Connecting thread	MPR-Hammer head fasteners		
		Max. recommended tensile load Fz [N]	Max. recommended transverse load Fq [N]	For a tightening torque of [Nm]
2.0	M8	7,000	1,500	10
	M10		2,300	20
	M12		3,300	30
2.5	M8	12,000	2,500	10
	M10		3,300	20
	M12		4,000	30