


### MPR-Girder cleats

#### Field of application

- Attachment of MPR-Support channels to steel girders without drilling or welding
- For indoor and outdoor use

#### Advantages



- Ideal solution for attachment of MPR-Support channels to steel girders
- Allows subsequent adjustment of the channels along and across the supporting beam
- Suitable for all flange thicknesses of common support profiles ( $\leq 24.5$  mm)
- Easy to install, pre-assembled kit
- Proper attachment of suspended loads on girders

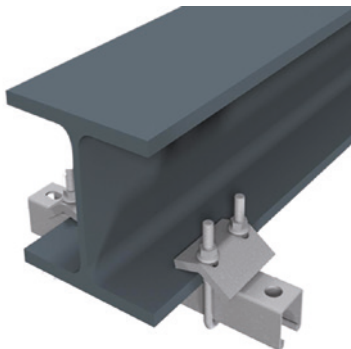

#### Features



For support channels	Thread U-brackets	Max. permitted loading/pair [N] with hammer head fasteners		
		M8	M10	M12
41/21/2.0 41/41/2.0	M10	7,000	7,000	7,000
41/62/2.5		12,000	12,000	12,000
41/82/2.0		7,000	7,000	7,000

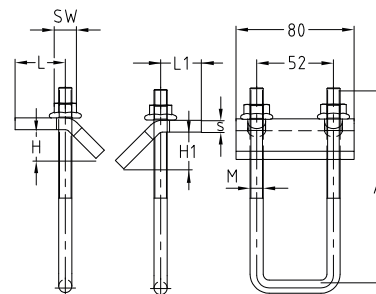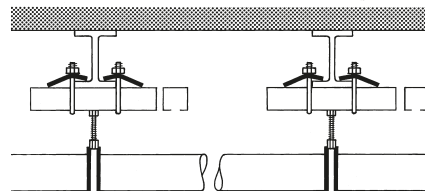

For support channels	Thread	Spanner width [SW]	Material	Part no.	Sales unit	Pack unit	Dimensions [mm]					
							A	H	H1	L	L1	s
41/21, 41/41	M10	15	V4A	154445	10	pieces	90	18.5	24.5	34	30	8
41/62, 41/82				154446			130					