

Single bossed clamps


with DÄMMGULAST® yellow, M10, hot-dip galvanised

Field of application

- Suitable for fixings in shipbuilding areas, as well as in industrial areas

Advantages

- Proven two-part clamp with increased material cross-section
- Connecting thread M10
- Stronger fastening latches in M8 for high load capacity
- Surface protection, thermally hot-dip galvanised
- Lining DÄMMGULAST® yellow, seawater proof
- Average vibration reduction up to 22 dB(A)

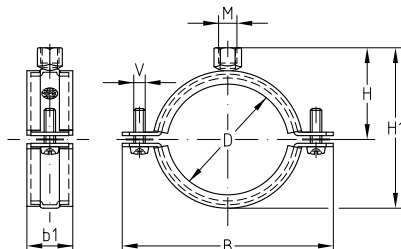

Connecting thread	Size		Clamping range	Clamp material	Connecting thread	Part no.	Sales unit	Pack unit
	[inch]	[mm]	[mm]	b x s [mm]				
M10	3/8		14–20	25 x 2.0	M8 x 30	147958	xx,xx	xx,xx
M10	1/2		20–26	25 x 2.0	M8 x 30	147959	xx,xx	xx,xx
M10	3/4		26–30	25 x 2.0	M8 x 30	147960	xx,xx	xx,xx
M10	1		32–38	25 x 2.0	M8 x 30	147961	xx,xx	xx,xx
M10	1 1/4		40–46	25 x 2.0	M8 x 30	147962	xx,xx	xx,xx
M10	1 1/2		48–54	25 x 2.0	M8 x 30	147963	xx,xx	xx,xx
M10		57	54–60	25 x 2.0	M8 x 30	147964	xx,xx	xx,xx
M10	2		60–66	25 x 2.0	M8 x 30	147965	xx,xx	xx,xx
M10		70	68–73	25 x 2.0	M8 x 30	147966	xx,xx	xx,xx
M10	2 1/2		72–80	25 x 2.0	M8 x 30	147967	xx,xx	xx,xx
M10		83	82–86	25 x 2.0	M8 x 30	147968	xx,xx	xx,xx
M10	3		88–92	25 x 2.0	M8 x 30	147969	xx,xx	xx,xx
M10		102	99–102	25 x 2.0	M8 x 30	147970	xx,xx	xx,xx
M10		110	108–112	30 x 3.0	M8 x 30	147971	xx,xx	xx,xx
M10	4		112–118	30 x 3.0	M8 x 30	147972	xx,xx	xx,xx
M10		125	125–130	30 x 3.0	M8 x 30	147973	xx,xx	xx,xx
M10		133	131–135	30 x 3.0	M8 x 30	147974	xx,xx	xx,xx
M10	5		137–142	30 x 3.0	M8 x 30	147975	xx,xx	xx,xx
M10		150	148–152	30 x 3.0	M8 x 30	147976	xx,xx	xx,xx
M10		160	159–164	30 x 3.0	M8 x 30	147977	xx,xx	xx,xx
M10	6		164–169	30 x 3.0	M8 x 30	147978	xx,xx	xx,xx



These products are manufactured exclusively on customer order. Minimum quantities and delivery time on request.