

MPR-Support channels







hot-dip galvanised

Field of application

- Ideal for pipe installation as support structure for air ducts in interiors and exteriors
- Variety of mounting options e.g. for shelves in combination with extensive range of system components

Advantages

- Quick and efficient attachment of pipe sections and multiple pipe-ways
- High bending stiffness due to the cross-section design
- Scale marks sideways and on the side with the slot simplify the alignment of the attachment elements during installation and facilitate the measuring and cutting to length of the section on site
- For secure fixing that is adjustable laterally and vertically
- For setting up structures with correctly measured static loads by means of diverse connection components
- Interlocking rail slot for positive locking of attachments
- Clean-cut appearance by the use of MPR-protection caps



Profile 41/21/2.0



Profile 41/41/2.0



Profile 41/41/2.5

Features

Profile	Length [mm]	Part no.	Sales unit	Pack unit
41/21/2.0	2,000	154173	1	pieces
	6,000	154175		
41/41/2.0	2,000	154176		
	6,000	154178		
41/41/2.5		154181		



MPR-Support channel


hot-dip galvanised

Field of application

- Ideal for pipe installation as support structure for air ducts in interiors and exteriors
- Variety of mounting options e.g. for shelves in combination with extensive range of system components

Advantages

- Quick and efficient attachment of pipe sections and multiple pipe-ways
- High bending stiffness due to the cross-section design
- Scale marks sideways and on the side with the slot simplify the alignment of the attachment elements during installation and facilitate the measuring and cutting to length of the section on site
- For secure fixing that is adjustable laterally and vertically
- For setting up structures with correctly measured static loads by means of diverse connection components
- Interlocking rail slot for positive locking of attachments
- Clean-cut appearance by the use of MPR-protection caps

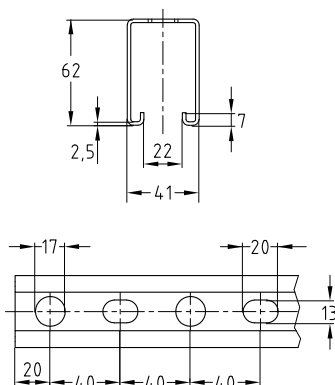

Profile 41/62/2.5

Features



Profile	Length [mm]	Part no.	Sales unit	Pack unit
41/62/2.5	6,000	154184	1	pieces

