

MPR-Saddle supports


hot-dip galvanised

Field of application


- Simple assembly of strong cross-beams using MPR-Support channels
- Applicable for cramped installation conditions in shafts and ducts
- For indoor and outdoor use

Advantages


- Good load transfer due to the high bending stiffness of the saddle connection
- Ideal connecting element for channel constructions
- Type for 41/82 and 41/124 profiles with rotation-free bearing due to clamping on both sides by the MPR-Support channels

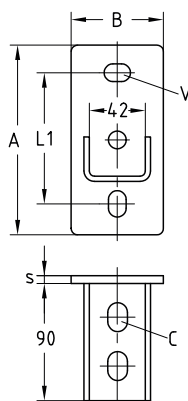

MPR-Saddle support, lengthwise

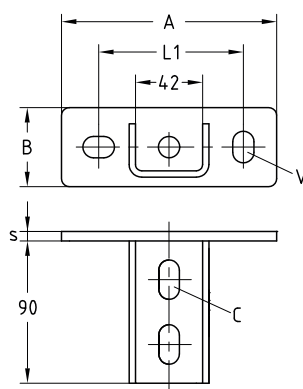

MPR-Saddle support, crosswise

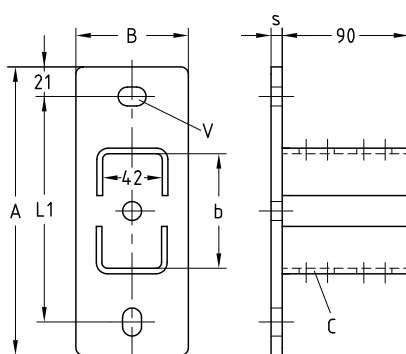

MPR-Saddle support, lengthwise
for profiles 41/82 and 41/124

Features

Design	For support channels	Part no.	Sales unit	Pack unit	Dimensions [mm]						
					A	B	b	L1	s	C	V
Crosswise	41/21–41/62	156820	25	pieces	136	50	–	91.5	6	13 x 25	13.5 x 20
Lengthwise		156819			144	70		100			
	41/82	159100	1		205	80	83	160	8		
	41/124	159099			245		125	200			

