



MPR-Construction bracket type S+ galvanised

Field of application

- Ideal connecting element for the construction of cross-beams, frames and shelving systems when used with MPR-Support channels
- For indoor use

Advantages

- A wide variety of installation options in MPR-Support channels and with the connection lock type S+
- Ensures stable corner joints

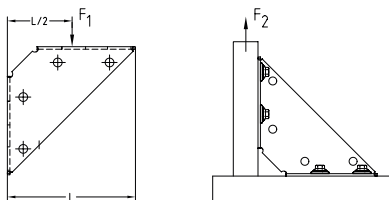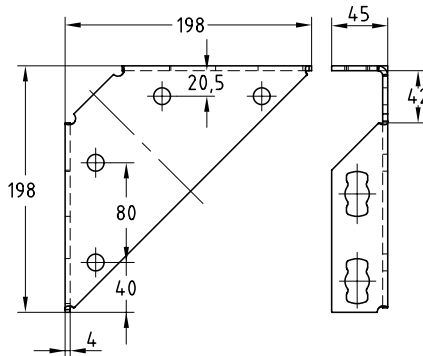

Features



Ausführung	Admissible load F_1 [N]	Admissible load F_2 (material thickness of support channel 2.0 mm) [N]	Admissible load F_2 (material thickness of support channel 2.5 mm) [N]
Konstruktionswinkel mit Strebe	3.500	4.000	5.000

Ausführung	Size [mm]	Part no.	Sales unit	Pack unit
Konstruktionswinkel mit Strebe	198 x 198	165864	1	pieces