
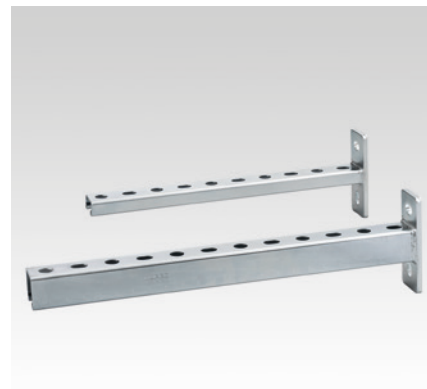


MPR-Wall hanger brackets

galvanised

Field of application

- Ideal as cantilever support structure of multisection pipeways
- Applicable as cantilever bracket for air ducts and cable trays
- Applicable in combination with saddle support and channel support brackets as a cross-beam for pipe attachments in shafts and ducts
- Solid wall bracket for valves and equipment
- For indoor use
- Selected sizes with VdS certificate for the installation of sprinkler systems

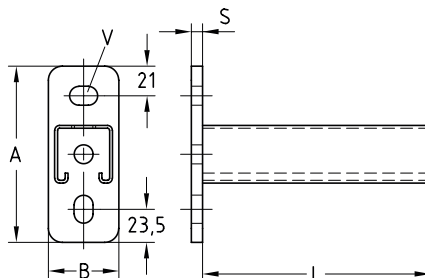

Wall hanger brackets with VdS certificate

Advantages

- The strong base plate ensures a high load carrying capacity
- Elongated- and cross-hole for flexible attachment to the building structure
- Variety of lengths covers all construction requirements
- Clean-cut appearance by the use of MPR-protection caps
- Wall hanger brackets with VdS certificate – oblong holes in a 50 mm grid

Features

Profile	Length L [mm]	VdS approved	Fire protection certified	Part no.	Sales unit	Pack unit	Dimensions [mm]											
							A	B	s	V								
41/21/2.0	160			156763	30	pieces	125	50	6	13.5 x 20								
	240			156764	25													
	320			156765														
	400			156766														
41/41/2.0	160			156767	20								8					
	240			156768														
	320			156769														
	400			156770	15													
	480			156771														
	560			156772														
	640			156773	10													
	720			156774														
	800			156775										1				
	1,040			156776														
41/41/2.5	150	●	●	166150	25													
	300	●	●	166151	20													
	450	●	●	166152	15													
41/62/2.5		●	●	166153	1													
	600	●	●	166154														
	800	●	●	166155														
	1,000	●		166156														



For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.