

MPR-Installation channels BV







oblong hole grid 50 mm, sendzimir galvanised

Field of application


- Fast and efficient attachment of piping and pipe routes
- Also ideal as support structure for air ducts

Advantages


- Back perforation matched to the spacings in the bulb flats used in shipbuilding
- Meshing into the channel slot for positive-fit attachment of add-on parts
- High flexural strength due to the practical cross-section design
- For secure fastening that is adjustable laterally and vertically
- For setting up structures with correctly dimensioned static loads via versatile connection components
- Strong, square C-section combines compact design with optimum load-bearing capacity

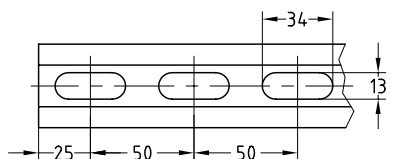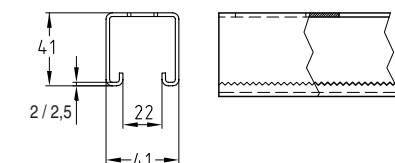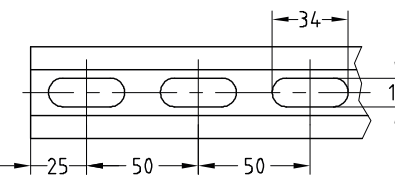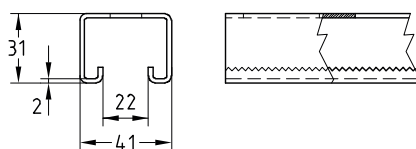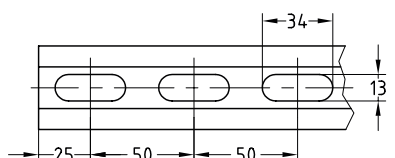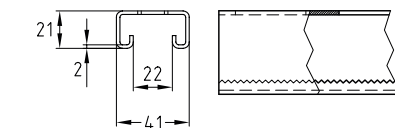

Profile 41/21/2.0

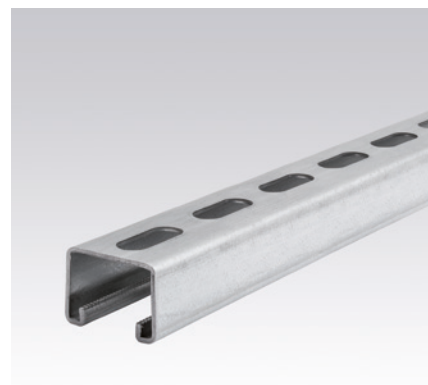

Profile 41/31/2.0

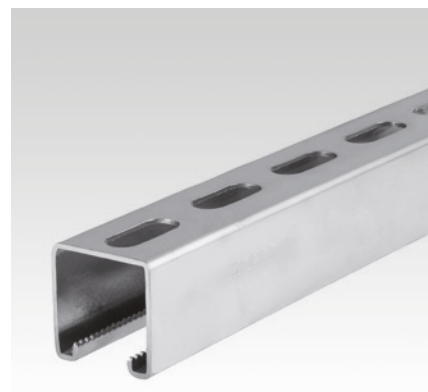

Profile 41/41/2.0, 41/41/2.5

Features

Profile	Length [mm]	Part no.	Sales unit	Pack unit
41/21/2.0 BV	3,000	161613	1	pieces
	6,000	161614		
41/31/2.0 BV	3,000	165778		
	6,000	165779		
41/41/2.0 BV	3,000	161611		
	6,000	161612		
41/41/2.5 BV	3,000	161608		
	6,000	161609		



We also manufacture MPR-Installation channels BV in other material/surface variants on request. These products are manufactured to order. Minimum quantities and delivery times on request.