

Suspension clamps


for spiral-seam pipes, two-pieces, galvanised

Field of application

- Attachment of air ducts

Advantages


- Proven two-piece design for attachment using the locking lugs
- Manufactured to suit spiral-seam pipe dimensions
- Attachment using threaded rods through the holes in the lugs
- Variety of attachment possibilities using hexagonal screws and nuts, as well as hanger sockets or eye bolts

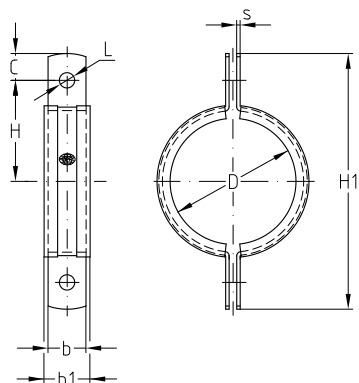

Features



Nominal size d ₂ [mm]	Max. recommended load [N]
71–160	2,133
180–250	4,533
280–560	7,000
630–800	8,666
900–1,250	9,066

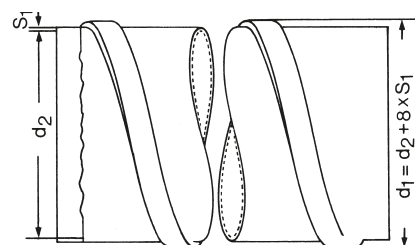

Suspension clamps

for spiral-seam pipes, two-pieces, galvanised

Nominal size d ₂ [mm]	Connection hole-Ø L [mm]	Artikel-Nr.	Dimensions [mm]					Sales unit	Pack unit
		With DÄMM- GULAST®	b x s	C	H1	H	b1	1	pieces
71	8.5	120095	20 x 1.0	14	141	57	23		
80		120111			150	61			
90		120127			160	66			
100		119888			171	72			
112		119904			183	78			
125		119916			196	84			
140		119924			211	92			
150		119928			221	97			
160		119936			231	102			
180		119952	25 x 1.5		252	112	28		
200		119963			272	122			
224		119971			296	134			
250		119980			322	147			
280	10.5	119983	25 x 2.5	15	354	162			
300		119987			374	172			
315		119996			391	181			
355		120012			431	201			
400		120020			476	223			
450		120032			526	248			
500		120048			576	273			
560		120063			636	303			
630		120079	25 x 3.0		709	340			
710		120091			787	379			
800		120107			880	425			
900		120123	30 x 3.0		980	475	34		
1.000		119884			1.082	526			
1.120		119900			1.201	586			
1.250		119911			1.332	651			

