

Single bossed clamps

with DÄMMGULAST® yellow, nut 35°, 40° and 45° welded on, galvanised

Field of application

- Suitable for fixings in shipbuilding and industrial areas, as well as in air-conditioning, ventilation and sanitary areas
- For indoor use

Advantages


- Proven two-piece single bossed clamp
- The 2 locking screws allow adjustments to accommodate a greater variation in pipe diameter
- Tightening bolts with combination cross-head convenient for power driver

- Tightening bolts secured with captive washers
- Heavy duty type with high load capacity due to creased shape
- Connection nut welded on at a 35°, 40° or 45° angle enables minimal pipe spacing distances where installation space is limited
- DÄMMGULAST® vibration control lining with yellow identification stripe: average sound level improvement up to 22 dB(A)



Features

Size	Max. recommended load [N]
3/8"-3/4"	1,100
1"-83 mm	2,000
3"-170 mm	3,200
212-225 mm	5,200

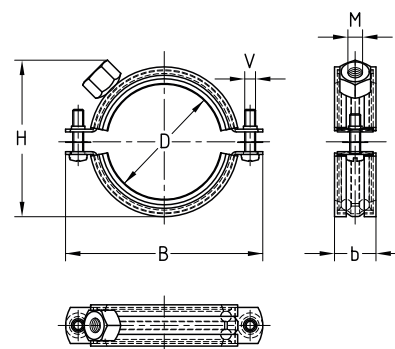

Connecting thread	Size		Clamping range [mm]	Welding angle [°]	Part no.	Sales unit	Pack unit	Dimensions [mm]			
	[inch]	[mm]						B	b	H	V
M8/M10	3/8		14-20	35	160320	100	pieces	62	23	63	M6 x 20
	1/2		21-26		160321			67		66	
	3/4		26-30	40	160322			68		72	
	1		31-38		160323			73		77	M6 x 25
	1 1/4		40-47	45	160324	50		77		88	
	1 1/2		48-54		160325			83		95	
		57	54-60		160326			88		100	
	2		60-66		160327			91		105	
		70	68-73		160328			102	28	115	M8 x 35
	2 1/2		73-80		160329			106		119	
		83	82-87		160330			113		128	
	3		87-94		160331			118		132	M8 x 40
		102	99-104		160332			126		143	
		110	105-112		160333			132		148	
	4		112-118		160334			138		154	
		125	122-128		160335			148		164	
		133	132-137		160336			157		173	
	5		137-142		160337			162		178	
		144	142-148		160338			168		184	
		150	149-156		160339			176		192	
		160	159-164		160340			184		200	
	6		164-169		160341			189		205	
		170	169-172		160342			191		207	
		212	208-214		160343	25		233		249	M10 x 40
	8		217-225		160344			244		260	
		225	225-232		160345			251		267	



These products are manufactured to order. Minimum quantities and delivery time on request.