

Single bossed clamps

heavy-duty version, with DÄMMGULAST® yellow

Field of application

- Suitable for attachments in ship-building and industrial areas, as well as in air-conditioning, ventilation and sanitary areas
- Application in areas with high demands on sound insulation
- For indoor and outdoor use

Advantages


- Stronger tightening bolts for high load capacity
- Enhanced braking resistance due to increased material cross-section area
- Vibration control lining DÄMMGULAST® with yellow identification stripe: average vibration improvement of up to 22 dB(A)



Features



Size	Max. recommended load [N]
1½"-2"	4,166
2½"-4"	5,000
133-315 mm	6,666
323 mm upwards	8,333

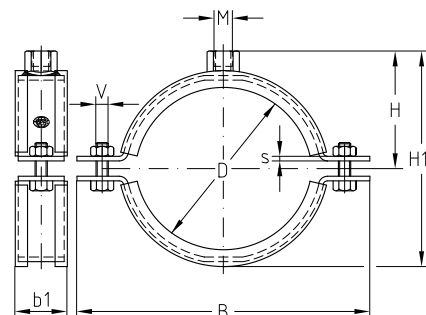

Connecting thread	Size		Clamping range [mm]	Part no.		Sales unit	Pack unit	Dimensions [mm]					
	[inch]	[mm]		V2A	V4A			B	b x s	b1	H	H1	V
M12	1½		45-52	121907	121323	50	pieces	111	30 x 3.0	34	48	81	M8
	2		56-64	122091	121339			123			54	93	
	2½		72-80	122103	121343			138			62	109	
	3		88-92	122258	121371	25		157			69	122	M10
		110	110-114	121953	121327		10	178	40 x 4.0	46	79	143	
	4		112-116	122345	121387			183			81	147	
		133	133-137	122010	121331			203			92	168	
	5		137-145	122425	121391			210			95	175	
		160	159-165	122044	121335			230			105	195	
	6		164-170	122469	121394			235			108	200	
		200	193-203	122119	121346			270			125	235	
		212	208-214	122147	121350			282			131	247	
		219	217-224	122159	121354			289			135	254	
		250	244-254	122210	121358			320			150	285	
		267	267-273	122226	121362			337			159	302	
		280	278-282	122246	121367			350			165	315	
		315	313-318	122290	121375			385			183	350	
		323	320-326	122298	121379			415	50 x 5.0	56	188	360	M12
		355	353-360	122321	121383	5		447			204	392	



Single bossed clamps can be produced in all other pipe sizes and types according to customer specifications. For use in areas with requirements on the duration of fire resistance, the boundary conditions set out in the fire test report must be observed.