

Pipe slides type TF-2

with two pipe clamps, DIN 3567

Field of application

- Attachment of pipelines preferably with insulation in heavy-duty building technology, industrial construction and plant engineering
- Preferred for insulated pipes lines
- For insulation thicknesses up to 140 mm

Advantages

- Special lengths are available upon request
- Also available with polyamide sliding plate upon request
- Also available in stainless steel as well as in primer coated version upon request



Nominal size DN	Pipe outer diameter D1 [mm]	Part no.		Sales unit	Pack unit
		W37-OR-SG	W37-OF-SF		
25	33.7	116485	116446	1	pieces
32	42.4	116488	116449		
40	48.3	116491	116452		
50	60.3	116494	116455		
65	76.1	116497	116458		
80	88.9	116500	116461		
100	114.3	116476	116437		
125	139.7	116479	116440		
150	168.3	116482	116443		

Pipe slide material	Pipe slide code	Pipe slide surface	Code for surface	Bolts and nuts	Code for bolts and nuts
S235JR (St37)	W37	untreated	OR	Strength class 8.8, galvanised	SG
		hot-dip galvanised	OF	Strength class 8.8, hot-dip galvanised	SF


Ordering example: T-section slide guide made from S235JR (St37) with 2 pipe clamps, pipe slide hot-dip galvanised, with hot-dip galvanised bolts and nuts, strength class 8.8, for pipe outer diameter of 76.1 mm.

Part no. 116458 Type: TF-2-W37-OF-SF-76.1



Pipe guide with polyamide sliding surface as well as other versions available upon request.

Pipe slides type TF-2 with two pipe clamps, DIN 3567

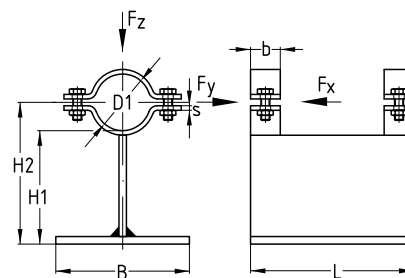

Nominal size DN	Pipe outer diameter D1 [mm]	Dimensions [mm]						Loading			Weight [kg/piece]
		s	b	L	B	H1	H2	F _x [kN]	F _y [kN]	F _z [kN]	
25	33.7	5	30	220	180	150	167	1.0	1.0	2.0	6.100
32	42.4						171	1.4	1.4	2.6	6.200
40	48.3						174	2.0	2.0	4.0	6.200
50	60.3	6	40				180	3.2	3.2	6.4	6.800
65	76.1						188	3.6	3.6	7.6	7.000
80	88.9						195	4.0	4.0	8.0	7.200
100	114.3	8	50				207	5.2	5.2	10.4	9.200
125	139.7						220	5.5	5.5	11.0	9.600
150	168.3						234	5.7	5.7	11.4	10.100

