

Pipe slides type TP-1

with one pipe clamp, DIN 3567

Field of application

- Attachment of pipelines in heavy-duty building technology, industrial construction and plant engineering
- For insulation thicknesses up to 75 mm for type TP80-1
- For insulation thicknesses up to 90 mm for type TP100-1

Advantages

- Special lengths are available upon request
- Also available with polyamide sliding plate on request
- Also available in stainless steel as well as in primer coated version upon request



	Nominal size DN	Pipe outer diameter D1 [mm]	Part no.		Sales unit	Pack unit
			W37-OR-SG	W37-OF-SF		
T-Profile 80	25	33.7	116871	116826	1	pieces
	32	42.4	116874	116829		
	40	48.3	116877	116832		
	50	60.3	116880	116835		
	65	76.1	116883	116838		
	80	88.9	116886	116841		
	100	114.3	116856	116811		
	125	139.7	116859	116814		
	150	168.3	116862	116817		
	(175)	193.7	116865	116820		
	200	219.1	116868	116823		
T-Profile 100	25	33.7	116611	116581		
	32	42.4	116614	116584		
	40	48.3	116617	116587		
	50	60.3	116620	116590		
	65	76.1	116627	116593		
	80	88.9	116630	116596		
	100	114.3	116602	116566		
	125	139.7	116605	116569		
	150	168.3	116624	116572		
	(175)	193.7	116633	116575		
	200	219.1	116608	116578		

Pipe slide material	Pipe slide code	Pipe slide surface	Code for surface	Bolts and nuts	Code for bolts and nuts
S235JR (St37)	W37	untreated	OR	Strength class 8.8, galvanised	SG
		hot-dip galvanised	OF	Strength class 8.8, hot-dip galvanised	SF


Ordering example: T-section slide guide made from S235JR (St37) with 1 pipe clamp, pipe slide hot-dip galvanised, with hot-dip galvanised bolts and nuts, strength class 8.8, for pipe outside diameter of 60.3 mm.

Part no. 116590 Type: TP100-1-W37-OF-SF-60.3



Pipe guide with polyamide sliding surface as well as other versions available upon request.

Pipe slides type TP-1 with one pipe clamp, DIN 3567

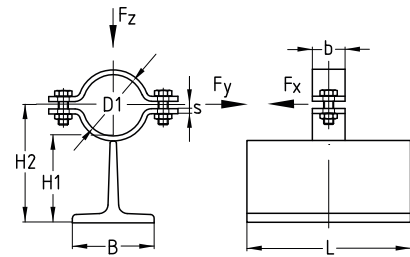

	Nominal size DN	Pipe outer diameter D1 [mm]	Dimensions [mm]						Loading			Weight [kg/piece]		
			s	b	L	B	H1	H2	F _x [kN]	F _y [kN]	F _z [kN]			
T-Profile 80	25	33.7	5	30	200	80	85	102	0.6	0.6	1.2	2.470		
	32	42.4						106	0.7	0.7		2.500		
	40	48.3						109				1.4	2.520	
	50	60.3	6	40			86	116	1.2	1.2	2.4	2.840		
	65	76.1						124	1.3	1.3	2.6	2.930		
	80	88.9						130	1.4	1.4	2.8	3.020		
	100	114.3	8	50			88	145	2.8	2.8	5.6	4.040		
	125	139.7						158	2.9	2.9	5.8	4.230		
	150	168.3			250			172				5.020		
	(175)	193.7			185			3.0	3.0	6.0	5.360			
	200	219.1			198						5.580			
T-Profile 100	25	33.7	5	30	200	100	105	122	0.5	0.5	1.0	3.610		
	32	42.4						126	0.6	0.6		1.2	3.640	
	40	48.3						129					3.660	
	50	60.3	6	40			106	136	1.1	1.1	2.2	4.045		
	65	76.1						144	1.3	1.3	2.6	4.105		
	80	88.9						150				4.195		
	100	114.3	8	50			108	165	2.8	2.8	5.6	5.180		
	125	139.7						178	3.0	3.0	6.0	5.370		
	150	168.3			250			192	3.3	3.3	6.6	6.440		
	(175)	193.7			205			3.5	3.5	7.0	6.780			
	200	219.1			218			3.7	3.7	7.4	7.010			

