

U-bolts

similar to DIN 3570, form A, galvanised

Field of application

- For simple pipe attachment in building technology and industrial construction
- Complies with the VdS (German Association of Property Insurers) Guideline 2092 for sprinkler systems

Advantages

- Design similar to DIN 3570
- Standard material S235JR (St37) acc. to DIN EN 10025
- Electrolytically galvanised
- Supplied with 4 nuts acc. to DIN 934. In the M8 to M12 versions, also with 4 washers




Versions M8 to M12 with nuts and washers



Versions M16 to M20 with nuts

Pipe outer diameter d1 [mm]	Nominal size	Part no.	Sales unit	Pack unit	Dimensions [mm]			
					b	d3	e	h1
22	15	113317	100	pieces	25	M8	30	52
27	20	113320			40		35	67
34	25	113323					42	74
43	32	113326					51	83
49	40	113329					57	89
61	50	124881	50		45	M10	71	104
77	65	124884					87	120
89	80	124887					100	132
108	100	124920	25		55	M12	121	162
115		124929					127	168
133	125	124932					146	183
140		124935					152	191
159	150	124938					172	208
169		124941					182	218
220	200	125109	5			M16	233	278
273	250	113174			70	M20	295	334
324	300	113180					352	385

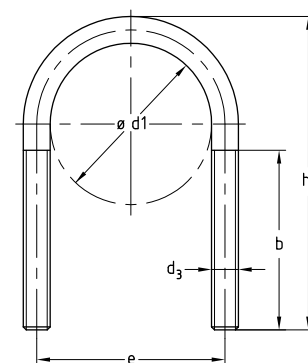

! U-bolts with M8 to M12 threads are supplied with 4 washers and 4 nuts acc. to DIN 934 in electrolytically galvanised finish. For M16 threads and bigger, they are supplied with 4 nuts but without washers. Other sizes can be supplied upon request.