

Duct clamps

with DÄMMGULAST® orange, galvanised

Field of application

- For attachment of spiral-seam pipes

Advantages

- Manufactured to suit spiral-seam dimensions
- Practical latching fastener: simple and secure insertion and fastening of the pipe due to quick fastener for nominal pipe size of up to 450 mm, M8 hexagon screws for pipe sizes from 450 mm and upwards
- Easy installation due to the wide opening angle of the clamp
- Added rigidity due to the grooved design of the duct clamp
- Easy clicking-in of the fastening bolt with the tip of a finger

- High level of safety due to the hinge-like opening
- No inadvertent opening once it has clicked in
- The easy click-in fastener allows opening and closing of the pipe clamp with only one hand
- DÄMMGULAST® Vibration control lining with orange identification stripe: average vibration reduction of 18 db(A)
- Manufactured to suite connecting thread M8/M10



This product is awarded with the "Gütezeichen Rohrbefestigung" (quality mark of pipe support) and is submitted to controls according to RAL-GZ 655-B



Pipe nominal size [mm]	Connecting thread	Part no.	Sales unit	Pack unit
80	M8/M10	143247	100	pieces
90		143248		
100		143249		
112		143250		
125		143251		
140		143252	50	
150		143253		
160		143254		
180		143255	25	
200		143256		
224		143257		
250		143258		
280		143259		
300		143260		
315		143261		
355		143262		
400		143263	1	
450		143264		
500		143265		
560		143266		
600		143267		
630		143268		
710		143269		
800		143270		




Duct clamps can be produced in all other pipe sizes and types according to customer specifications.

Duct clamps with DÄMMGULAST® orange, galvanised

Features



Nominal pipe diameter [mm]	Max. recommended load [N]
80–200	700
224–450	1,000
500–800	1,200

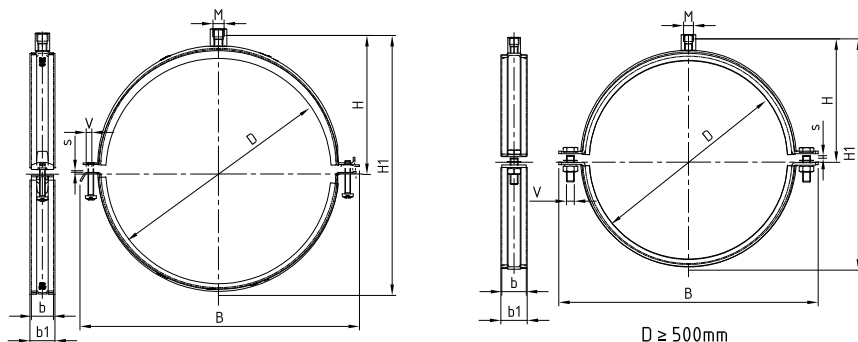

Pipe nominal size [mm]	Dimensions [mm]					
	V	b x s	B	b1	H	H1
80	M5	20 x 1.5	124	23	65	114
90			137		70	124
100			149		76	135
112			157		82	147
125			170		88	160
140			185		96	175
150			195		101	185
160			205		106	195
180			225		116	215
200			245		126	235
224	M6	25 x 1.5	286	28	138	259
250			312		151	285
280			342		166	315
300			363		177	336
315			378		184	351
355			418		204	391
400			25 x 2.0		462	227
450		513			253	487
500		M8			567	278
560			25 x 2.5		627	308
600	667			328	638	
630	697			343	668	
710	777			383	748	
800	867			428	838	